




AS 4087 B9  
PN35

GALVANISED BACKING RING (5961)  
STAINLESS BACKING RING (5962)  
NYLON COATED BACKING RING (5964)

SIZE (MM)	NOMINAL FLANGE SIZE	D (MM)	I (MM)	T (MM)	P (MM)	BOLT HOLES NO X DIA	BOLT
63	50	165	78	19	127	4X18	M16
75	65	185	92	19	146	8X18	M16
90	80	205	108	24	165	8X18	M16
110	100	230	128	24	191	8X18	M16
125	100	230	135	24	191	8X18	M16
160	150	305	178	31	260	12X22	M20
180	150	305	185	31	260	12X22	M20
200	200	370	235	31	324	12X22	M20
225	200	370	238	31	324	12X22	M20
250	250	430	288	38	381	12X26	M24
280	250	430	300	38	381	12X26	M24
315	300	490	338	38	438	16X26	M24
355	350	550	376	48	495	16X30	M27
n/a	375	580	n/a	48	521	16X30	M27
400	400	610	430	48	552	20X30	M27
450	450	675	470	58	610	20X33	M30
500	500	735	533	58	673	24X33	M30
630	600	850	645	68	781	24X36	M33
710	700	935	740	78	857	24X36	M33
800	800	1060	843	84	984	28X36	M33
900	900	1185	947	94	1105	32X39	M36
1000	1000	1275	1050	98	1194	36X39	M36
1200	1200	1530	-	108	1441	40X42	M39

Note: This table has bolting compatibility with AS 2129 Table F & H flanges.

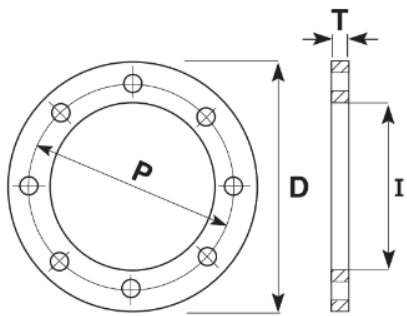

**Comments:**

Check that both pipe(s) and fitting to be joined are compatible, only compatible materials should be joined together. Check the PN and SDR rating marked on fitting and compare with that of the pipe. If in doubt, seek advice from the manufacturer. Correct installation procedures should be followed.

The designs, materials and specifications shown are subject to change without notice. This is due to the continuous development of our product range

Contact our technical team for further information.

**Wellington**  
17 Raiha Street, Porirua

**Auckland**  
3/68 McLaughlins Road, Wiri

**P** 0800 473 100  
**E** sales@upg.net.nz  
**W** upg.nz