


**DRESS SETS GALVANISED (DS)  
STAINLESS (SSDS)**

DETERMINE THE REQUIRED LENGTH OF BOLTS

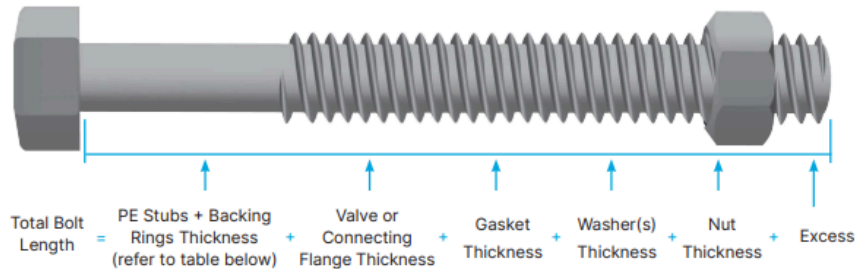

STANDARD FLANGES: COMBINED THICKNESS OF PE STUB FLANGE & BACKING RING

PIPE SIZE (MM)	FLANGE SIZE (INCH)	SDR11				SDR17			
		AS2129 TABLE E	AS4087 PN16	BS 4504 PN16	ANSI 150	AS2129 TABLE E	AS4087 PN16	BS 4504 PN16	ANSI 150
32	1"	17	-	24	16	-	-	-	-
40	1 1/4"	19	-	25	17	-	-	-	-
50	1 1/2"	21	-	30	20	21	-	30	20
63	2"	25	26	33	23	24	25	33	22
75	2 1/2"	27	28	35	25	28	29	35	26
90	3"	30	29	36	28	30	29	36	28
110	3 1/2"	31	31	-	-	30	30	-	-
110	4"	32	32	37	29	31	31	37	28
125	4"	40	39	44	36	32	31	44	28
125	5"	40	-	48	39	32	-	48	31
140	5"	39	-	47	38	32	-	47	31
160	5"	39	-	47	38	32	-	47	31
160	6"	42	38	47	38	35	31	47	31
180	6"	48	44	53	44	37	33	53	33
200	8"	51	51	54	45	43	43	54	37
225	8"	52	52	55	46	43	43	55	37
250	10"	57	54	57	48	47	44	57	38
280	10"	57	54	57	48	47	44	57	38
315	12"	65	63	62	56	50	48	62	41
355	14"	70	70	66	59	60	60	66	49
400	16"	77	75	75	67	65	63	75	55
450	18"	95	90	-	82	80	75	-	67
500	20"	98	98	-	85	98	98	-	85
560	22"	104	-	-	-	104	-	-	-
630	24"	113	113	-	94	108	108	-	89

**Comments:**

Check that both pipe(s) and fitting to be joined are compatible, only compatible materials should be joined together. Check the PN and SDR rating marked on fitting and compare with that of the pipe. If in doubt, seek advice from the manufacturer. Correct installation procedures should be followed.

The designs, materials and specifications shown are subject to change without notice. This is due to the continuous development of our product range

Contact our technical team for further information.

**Wellington**  
17 Raiha Street, Porirua

**Auckland**  
3/68 McLaughlins Road, Wiri

**P** 0800 473 100  
**E** sales@upg.net.nz  
**W** upg.nz