upg PIPE SYSTEMS




HDPE RING SEAL ADAPTOR

110 - 315MM

Ultimate Solutions.
Intelligent Delivery.

DWV (PVC) to HDPE Ring Seal Adaptor



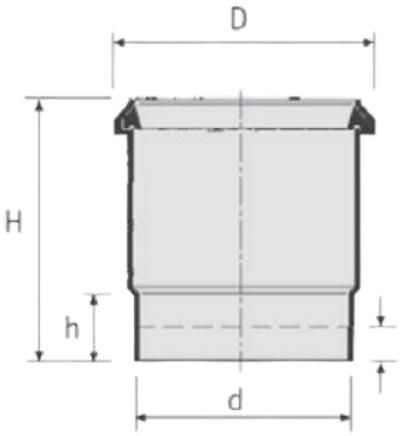

COMMENTS

- PVC pipe must be chamfered at end before insertion to avoid damage to rubber ring when installing
- Rubber ring must be adequately lubricated before insertion
- PVC pipe must cut straight and shall be inserted to full depth of the adaptor socket

This product has been inspected and/or manufactured in accordance with the below requirements, where relevant:
1. AS/NZS 4401
2. UNI EN1519

STANDARD COMPOSITION

- PVC Size: 100mm, 150mm, 175mm, 225mm, 300mm DWV
- HDPE Size: 110mm, 125mm, 160mm, 180mm 200mmOD, 250mmOD, 315mmOD – other sizes made to order
- Rubber Ring: EDPM material
- Leg Length suitable for Electrofusion welding
- Operating temperature (-40°C to +70°C with peaks to 95°C for HDPE)
- Flow from HDPE to PVC or PVC to HDPE are both suitable for this adaptor

SIZES

PRODUCT CODE	PE SIZE (MM)	PVC SIZE (MM)
6006-0110	110	100
6006-0125	125	100
6006-0160	160	150
6006-0180	180	150
6006-0200	250	225
6006-0315	315	300

Available in other SDR ratings and other sizes on request.

WELLINGTON
17 Raiha Street, Porirua

AUCKLAND
3/68 McLaughlins Road, Wiri

P 0800 473 100
E sales@upg.net.nz
W upg.nz