

upg PIPE
SYSTEMS


REINERT-RITZ



Quick-Twist Flange to Flange



Ultimate Solutions.
Intelligent Delivery.

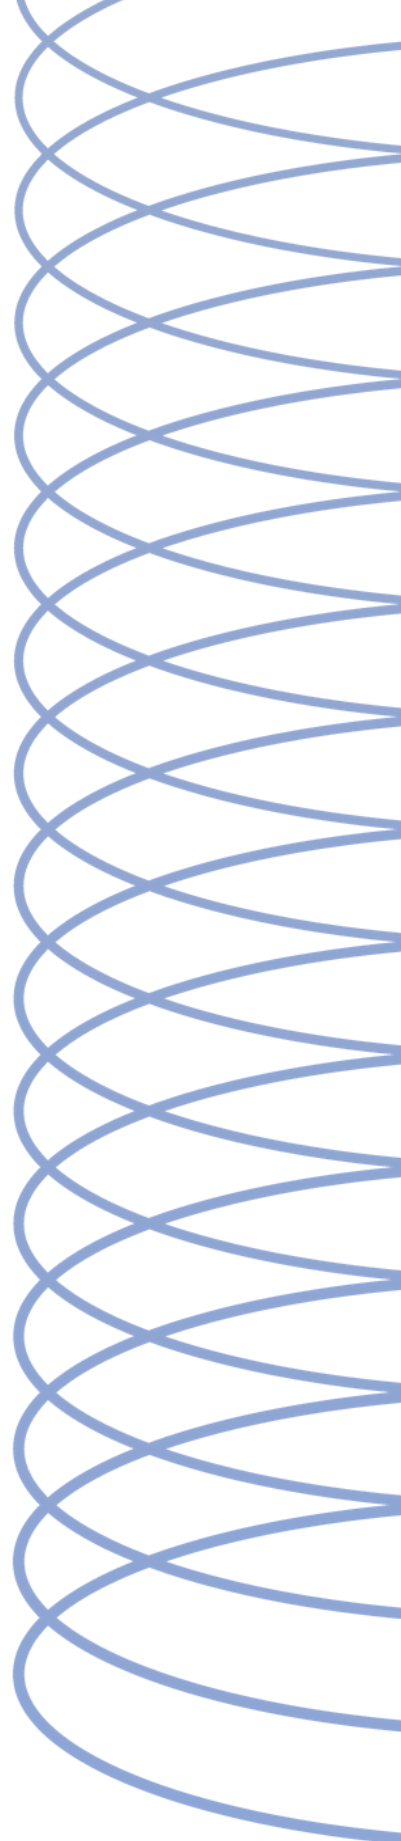

QUICK-TWIST FLANGE TO FLANGE

Flanges

- HP flange (loose flange) and special flange VP (fixed flange)
- Each in conformity with pressure class
- Both made of high-strength plastic

Seal

- Depending on application: EPDM or NBR

Flange: DIN EN 1092-1

DVGW for HP flange and special flange VP:

DV-8606BT0423 (Ø 75 mm - Ø 225 mm)


DV-8611BT0424 (Ø 250 mm - Ø 630 mm)

O-Ring: DIN EN 681-1

Z in centre position

Tolerances:

Z --> Tab./tab. 1

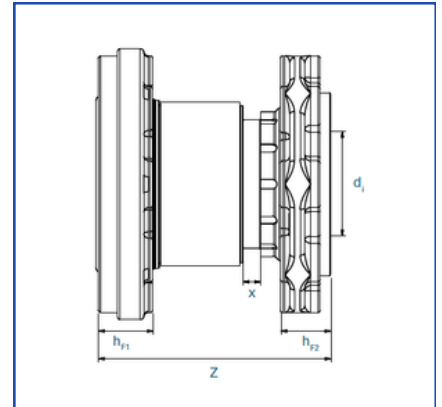

SDR	>41	33	26	21	17.6	17	13.6	11	9	7.4	6	>5

DN	PN	Z	x	h _{F1}	h _{F2}	d _i inside diameter	
		in center position	adjustment path	special flange VP	HP-Flange	PFA 16 bar	PFA 10 bar
50	10/16	180	±15	30	38	46	50
65	10/16	180	±15	52	38	55	60
80	10/16	200	±15	50	40	72	77
100	10/16	200	±15	47	43	90	97
125	10/16	200	±15	47	48	113	119
150	10/16	220	±15	49	53	135	145
200	10	220	±15	49	53	-	185
250	10	220	±15	55	57	-	235

WELLINGTON

17 Raiha Street, Porirua

AUCKLAND

3/68 McLaughlins Road, Wiri

P 0800 473 100

E sales@upg.net.nz

W upg.nz

