

upg PIPE
SYSTEMS

REINERT-RITZ



Quick-Twist Flange to Spigot End



Ultimate Solutions.
Intelligent Delivery.

QUICK-TWIST FLANGE TO SPIGOT END

Flanges

- HP flange (loose flange) and special flange VP (fixed flange)
- Each in conformity with pressure class
- Both made of high-strength plastic

Seal

- Depending on application: EPDM or NBR

Flange: DIN EN 1092-1

DVGW for HP flange and special flange VP:

DV-8606BT0423 (Ø 75 mm - Ø 225 mm)


DV-8611BT0424 (Ø 250 mm - Ø 630 mm)

O-Ring: DIN EN 681-1

Z in centre position

Tolerances:

Z --> Tab./tab. 1

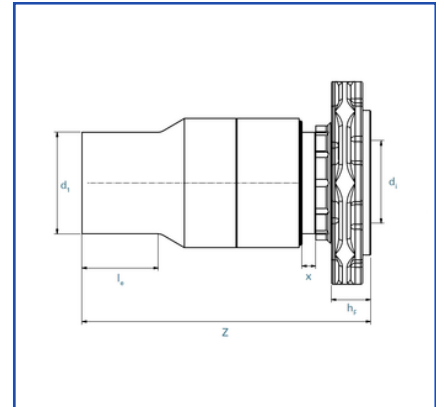

SDR	>41	33	26	21	17.6	17	13.6	11	9	7.4	6	>5

DN	PN	d _i spigot-end	Z in center position	x adjustment path	h _{F1} special flange VP	h _{F2} HP-Flange	d _i inside diameter	
							SDR 11	SDR 17
50	10/16	63	305	±15	38	80	46	50
65	10/16	75	305	±15	38	80	55	60
80	10/16	90	305	±15	40	80	72	77
100	10/16	110	315	±15	43	83	90	97
100	10/16	125	315	±15	43	88	90	97
125	10/16	140	325	±15	48	93	113	119
150	10/16	160	370	±15	53	98	135	145
150	10/16	180	375	±15	53	105	135	145
200	10	200	405	±15	53	112	-	185
200	10	225	405	±15	53	120	-	185
250	10	250	445	±15	57	132	-	235
250	10	280	445	±15	57	142	-	235

WELLINGTON

17 Raiha Street, Porirua

AUCKLAND

3/68 McLaughlins Road, Wiri

P 0800 473 100

E sales@upg.net.nz

W upg.nz

