


PE/STEEL TRANSITION

PE100 • SDR11 • 16BAR • 500KPA GAS

SIZE (MM)	CODE	D2 (MM)	L (MM)	L1 (MM)	L2 (MM)	S1 (MM)	S2 (MM)
25	2554-2525	25	495	160	335	2.6	3.0
32	2554-3232	32	495	160	335	3.2	3.0
40	2554-4040	40	495	160	335	3.2	3.7
50	2554-5050	50	495	160	335	3.2	4.6
63	2554-6363	63	520	185	335	3.6	5.8
90	2554-9090	90	525	190	335	4.0	8.2
110	2554-1111	110	525	190	335	4.5	10.0
125	2554-1212	125	525	190	335	4.5	11.4
160	2554-1616	160	670	200	470	5.0	14.6
180	2554-1818	180	670	200	470	5.0	16.4
200	2554-2020	200	730	200	520	5.6	18.2
225	2554-2222	225	680	200	500	5.6	20.5
250	2554-2525	250	720	220	500	6.3	22.7
315	2554-3131	315	850	350	500	8.0	28.6

Note: Please specify threaded or plain end

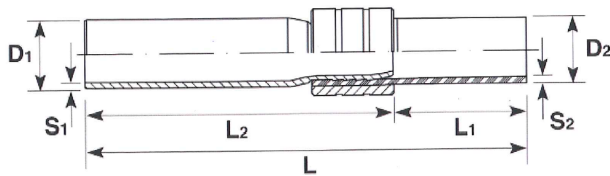

90° MULTIBEND / RADIUS ELBOW

PE100 • SDR11 - SDR17

SIZE (MM)	CODE SDR11	Z (MM)	L1 (MM)	CODE SDR17	Z (MM)	L1 (MM)
32	3884-0032	79	48	-	-	-
40	3884-0040	92	52	-	-	-
50	3884-0050	107	59	3886-0050	108	59
63	3884-0063	131	69	3886-0063	130	67
75	3884-0075	153	76	3886-0075	152	76
90	3884-0090	176	83	3886-0090	173	83
110	3884-0110	193	84	3886-0110	193	85
125	3884-0125	216	92	3886-0125	216	92
140	3884-0140	237	96	3886-0140	237	97
160	3884-0160	262	103	3886-0160	260	102
180	3884-0180	294	115	3886-0180	290	113
200	3884-0200	317	122	3886-0200	317	122
225	3884-0225	351	131	3886-0225	350	130
250	3884-0250	382	133	3886-0250	382	134
280	3884-0280	432	153	3886-0280	430	154
315	3884-0315	471	154	3886-0315	465	153

Note: suitable for electrofusion couplers

