


PE/Steel Transition

PE100 • SDR11 • 16BAR • 500KPA GAS

SIZE	CODE	D2	L	L1	L2	S1	S2
25	2554-2525	25	495	160	335	2.6	3
32	2554-3232	32	495	160	335	3.2	3
40	2554-4040	40	495	160	335	3.2	3.7
50	2554-5050	50	495	160	335	3.2	4.6
63	2554-6363	63	520	185	335	3.6	5.8
90	2554-9090	90	525	190	335	4	8.2
110	2554-1111	110	525	190	335	4.5	10
125	2554-1212	125	525	190	335	4.5	11.4
160	2554-1616	160	670	200	470	5	14.6
180	2554-1818	180	670	200	470	5	16.4
200	2554-2020	200	730	200	520	5.6	18.2
225	2554-2222	225	680	200	500	5.6	20.5
250	2554-2525	250	720	220	500	6.3	22.7
315	2554-3131	315	850	350	500	8	28.6

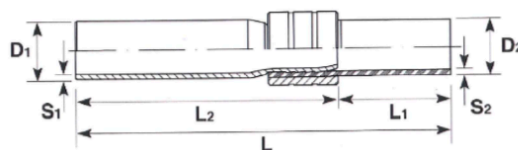

Note: please specify threaded or plain end

Comments:

Check that both pipe(s) and fitting to be joined are compatible, only compatible materials should be joined together. Check the PN and SDR rating marked on fitting and compare with that of the pipe. If in doubt, seek advice from the manufacturer. Correct installation procedures should be followed.

The designs, materials and specifications shown are subject to change without notice. This is due to the continuous development of our product range

Contact our technical team for further information.